


TYPE UB
MOD. EL/UB-M

SEGNALATORE UNITA' BASE RIDOTTA CON CAVO
SHORT BASE UNIT SIGNAL LAMP WITH WIRE

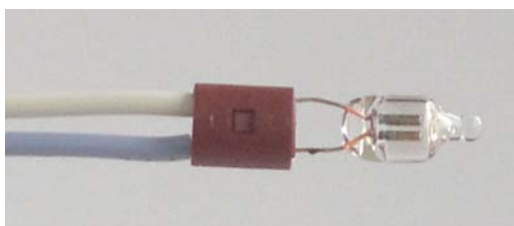

<p>TENSIONE Da2V a 400V LAMPADA neon; fluoro; incandescenza; LED TEMPERATURA 90°C; 120°C; 150°C. TIPO CAVO silicone; vetro silicone; pvc TERMINALI A richiesta</p> <p>APPROVAZIONI UL-CSA – VDE - CE</p>	<p>VOLTAGE From 2V to 400V LAMP Neon; fluorescent; incandescence; LED TEMPERATURE 90°C; 120°C; 150°C. WIRES silicone; glass fiber silicone; pvc TERMINALS Upon request</p> <p>APPROVALS UL-CSA – VDE - CE</p>
--	---

-Questo segnalatore può essere fornito già cablato e/o con cavetteria aggiuntiva
-This signal lamp can be supplied wired and with additional wires

