
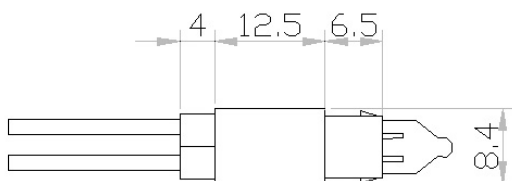


TYPE UB
MOD. EL/UB-D

SEGNALATORE CON CAVO UNITA' BASE CON DENTELLO PER SUPPORTO LENTI
BASE UNIT SIGNAL LAMP FOR EXTRACTABLE LENS

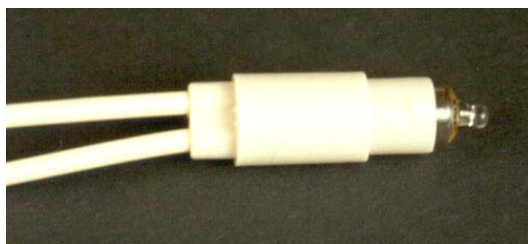

<p>TENSIONE Da 2V a 400V LAMPADA neon; fluoro; incandescenza; LED TEMPERATURA 90°C; 120°C; 150°C. TIPO CAVO silicone; vetro silicone; pvc TERMINALI A richiesta</p> <p>APPROVAZIONI UL-CSA - VDE - CE</p>	<p>VOLTAGE From 2V to 400V LAMP Neon; fluorescent; incandescence; LED TEMPERATURE 90°C; 120°C; 150°C. WIRES silicone; glass fiber silicone; pvc TERMINALS Upon request</p> <p>APPROVALS UL-CSA - VDE - CE</p>
---	---

- **Questo segnalatore può essere fornito già cablato e/o con cavetteria aggiuntiva**

Utilizzabile singolarmente o corredato di lenti e/o adattatori per l'utilizzo su pannello con fori dei vari diametri.

- **This signal lamp can be supplied wired and with additional wires**

It can be used alone or along with lenses and/or adaptors for panel with holes of different diameters

